



Anti Starting Block


Open Drawing

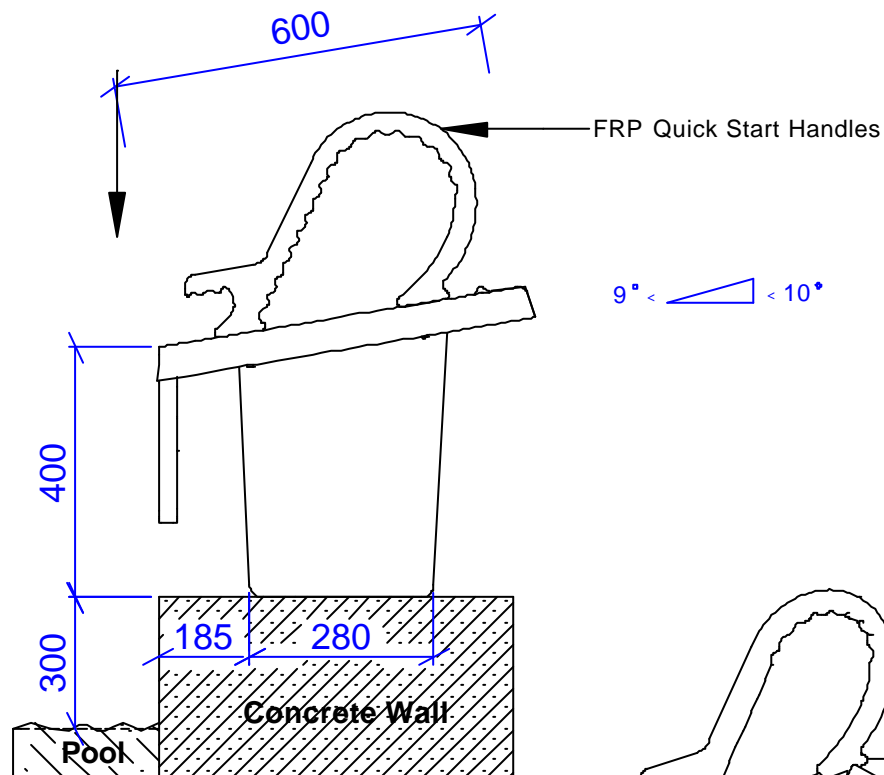

Side Elevation

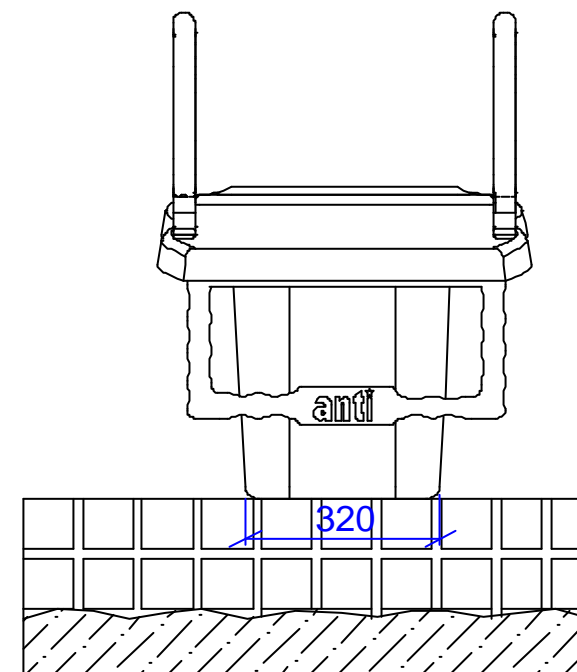

Pool Elevation

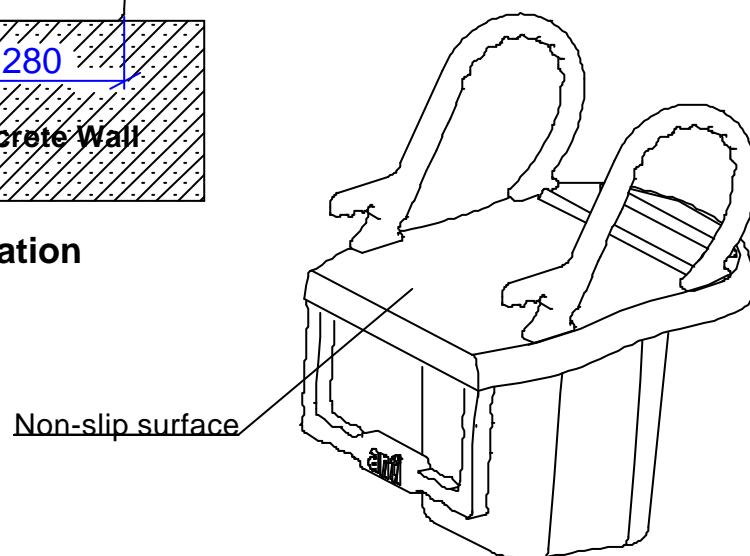

Oblique View

antiTM

©ANTI WAVE 2007

PROPRIETARY AND CONFIDENTIAL

The information contained in this drawing is the sole property of ANTI WAVE, any reproduction in part or as a whole without the written permission of ANTI WAVE is prohibited.

Project Name:

Anti Starting Block

Drawn

Philip

Scale

No

Product Name:

Anti Starting Block

Patents

2001285610;7100219;4048677;01818714.5 & 2003/2920 e.g.

Project No.

AWE00020

Drawn Date

2007-04-26



Product No.

01

Verify Date

Anti Starting Block


Open Drawing

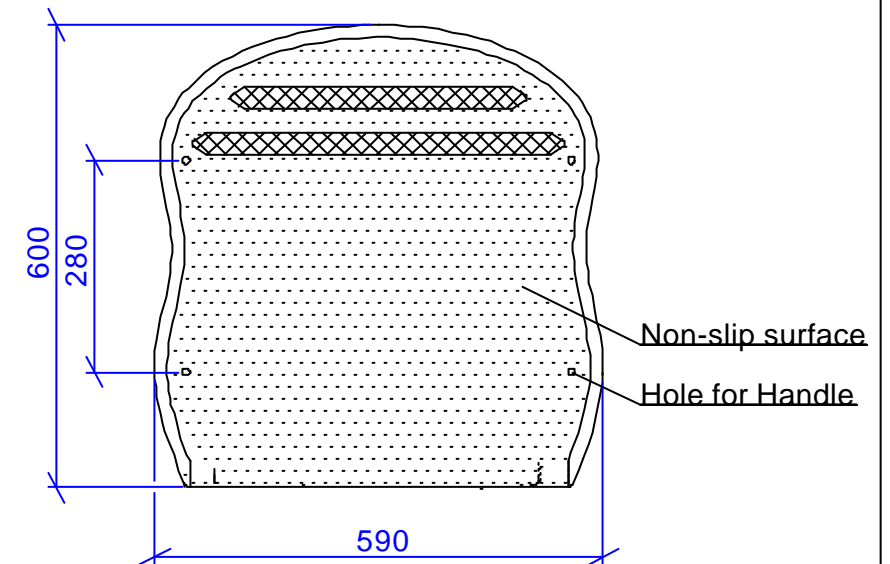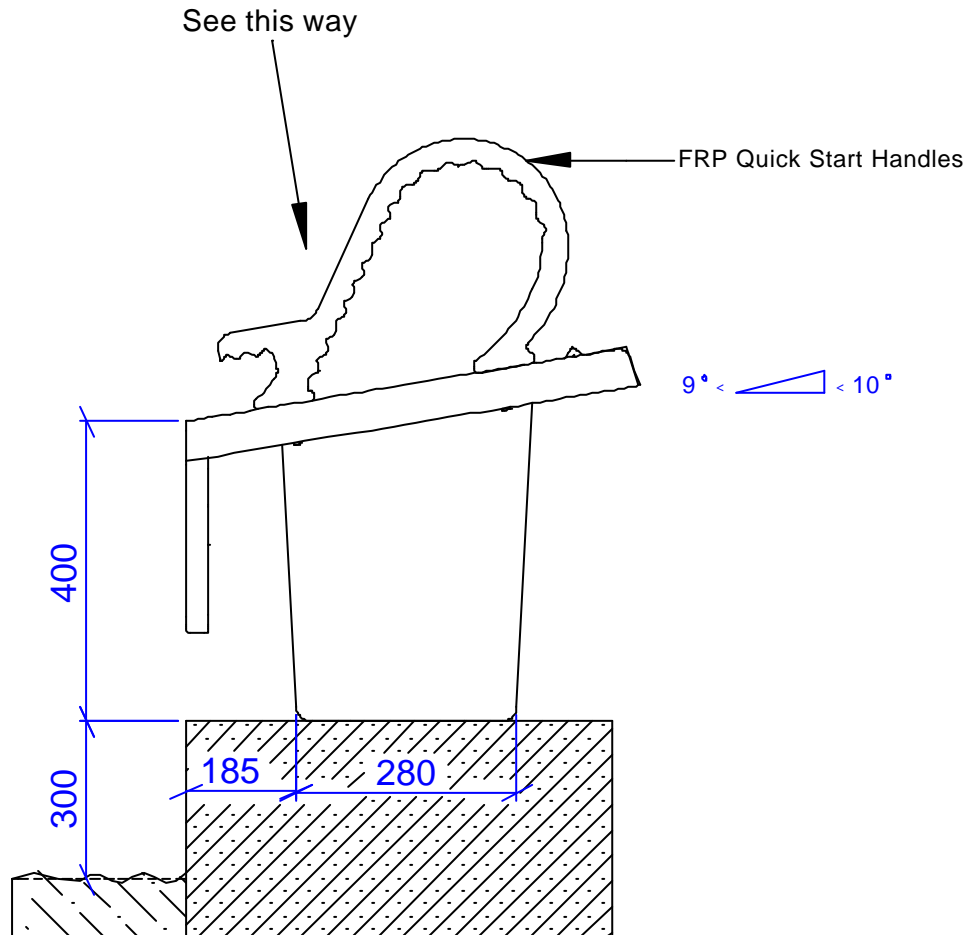


Top of Anti Block

Anti Starting Block

Open Drawing

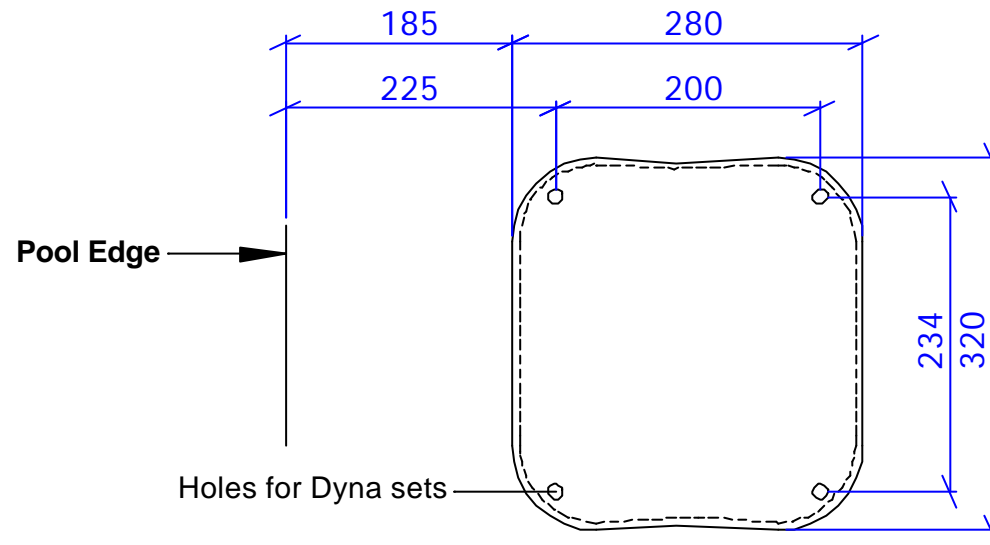

Anti Block Bottom

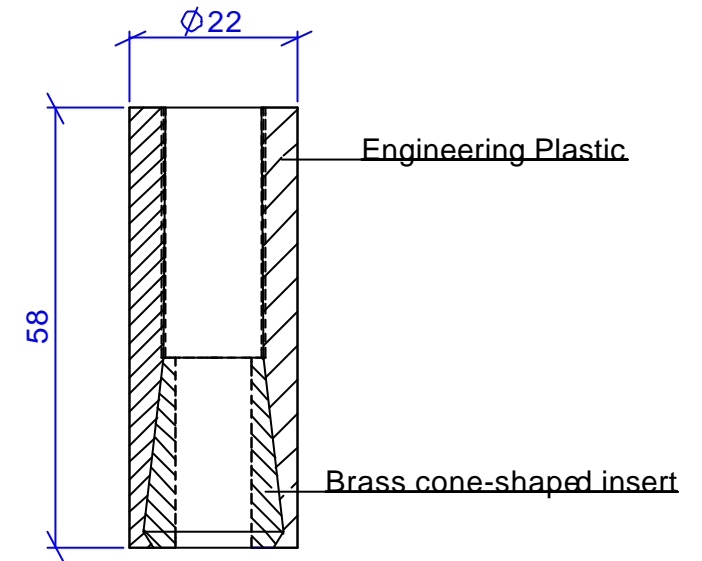

Plastic Dyna set



PROPRIETARY AND CONFIDENTIAL

The information contained in this drawing is the sole property of ANTI WAVE, any reproduction in part or as a whole without the written permission of ANTI WAVE is prohibited.

Project Name:

Anti Starting Block

Product Name:

Anti Starting Block

Project No. AWE00020

Product No. 03

Drawn Date 2007-04-26

Verify Date

Drawn

Philip

Scale



No

Patents

2001285610;7100219;4048677;01818714.5 & 2003/2920 e.g.


Anti Block Assembly Instructions

General Sketch

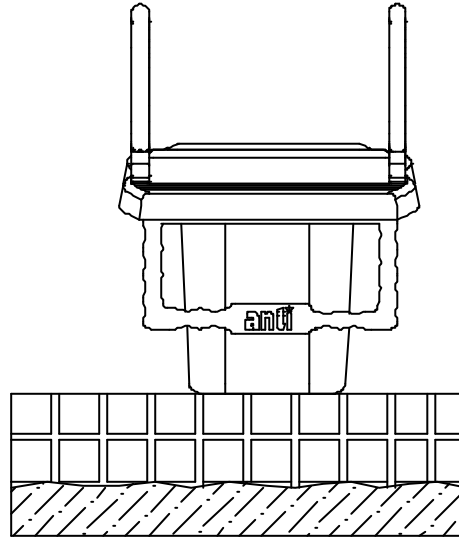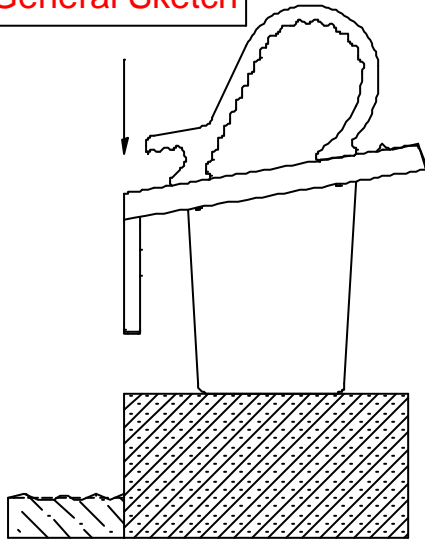


No.	Name	Qty
①	Anti Block	1
②	FRP Quick Start Handle	2
③	Back Hole Cover	1
④	Plastic Dyna Set	4
⑤	M10X70 Hex Bolt and Washer	4
⑥	M10 Lock Nut and Washer	4

Step 1

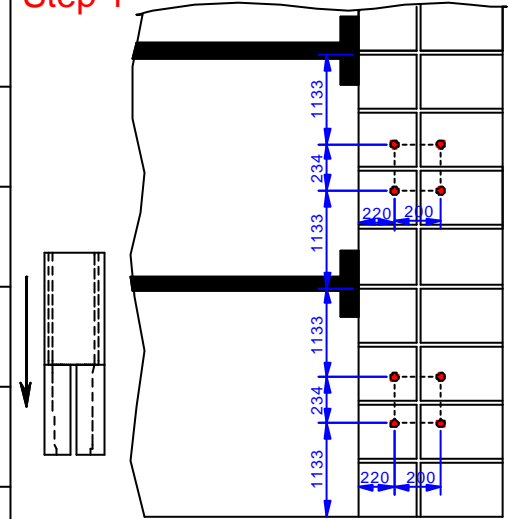


Use an 22.5 mm drill bit to drill 4 holes in the concrete.(depth 55mm), then place the Dyna set in the hole and make sure that the expander plug is driven down to spread the anchor.

Step 2

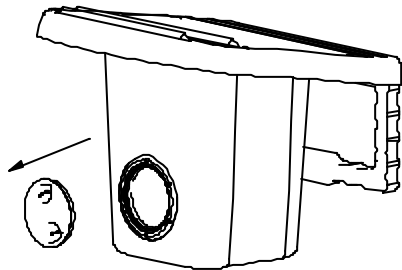


Remove the Plastic Cover at the back of the Start Block,align its 4 predrilled holes at the bottom with the 4 holes in the concrete.

Step 3

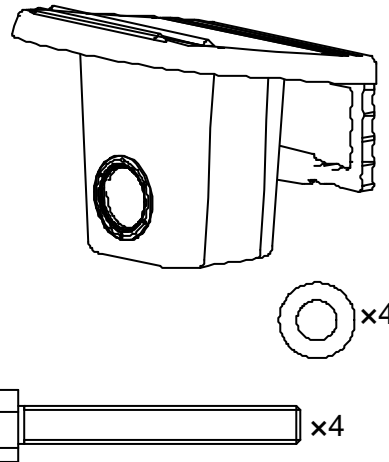


Use the M10X70 Hex Bolts and Washers to fasten the Super Block to the Concrete.

Step 4

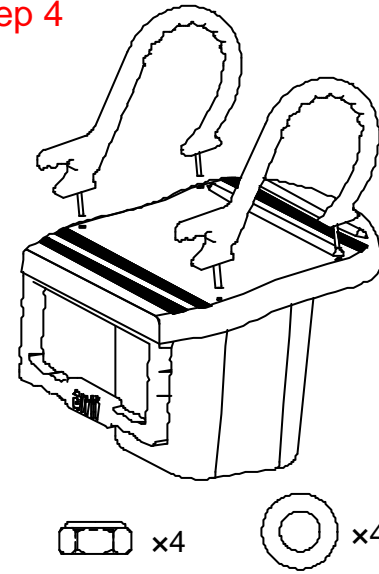

Use M10 Lock Nuts and Washers to fix the FRP Quick Start Handles.

Step 5

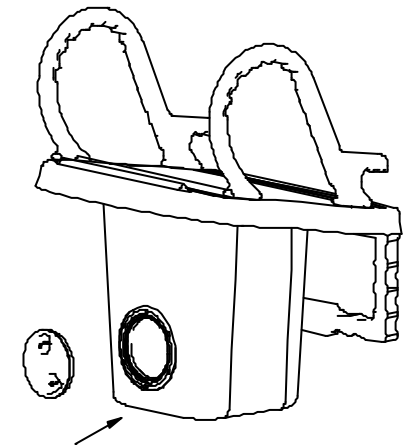

Close the Back Cover, then follow Step 1 to Step 5 to install each of other Anti Blocks.

anti
©ANTI WAVE 2007

PROPRIETARY AND CONFIDENTIAL
The information contained in this drawing is the sole property of ANTI WAVE, any reproduction in part or as a whole without the written permission of ANTI WAVE is prohibited.

Project Name:

Anti Starting Block

Product Name:

Assembly Instruction

Project No. AWE00020

Drawn Date 2007-04-26

Product No. 04

Verify Date

Drawn Philip

Scale

No

Patents

2001285610;7100219; 4048677;01818714.5 & 2003/2920 e.g.